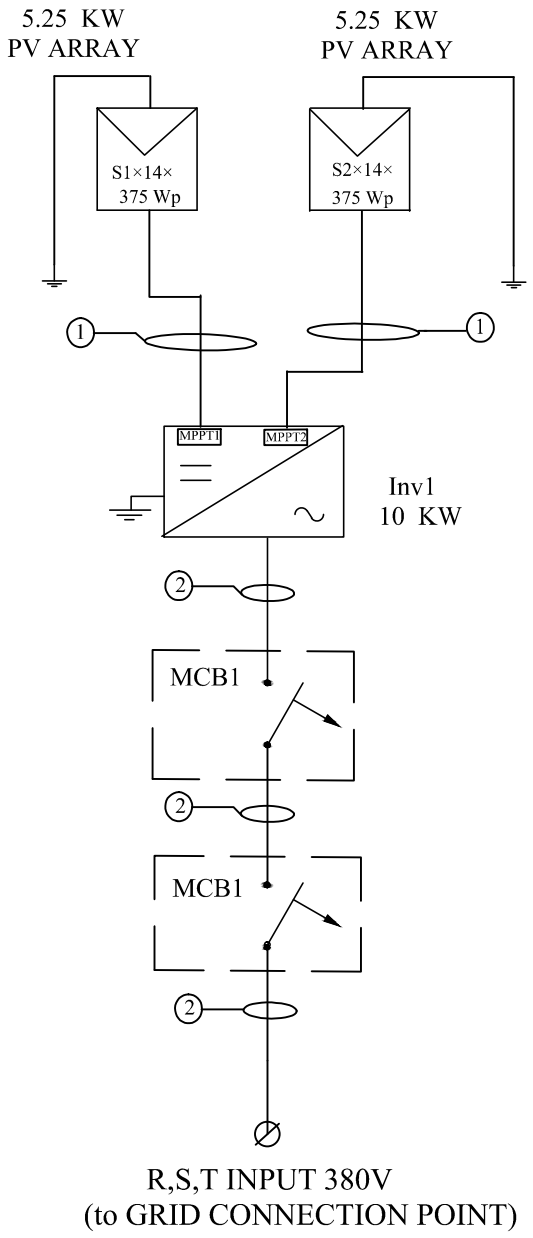


Component Specifications

PV Modules							
Brand	**Model**	**Qty**	**Pmax**	**Vmpp**	**Impp**	**Voc**	**Isc**
Areco	MonoPerc 375 Watt	28	375W	39.9V	9.4 A	48.3V	9.85A

Inverters					
Brand	**Model**	**Qty**	**Pmax**	**No.MPPT**	**No.Input/ MPPT**
Kaco	Blueplanet 10.0 TL3	1	10 KW	2 Mppt	1 Input

System Summary

Total PV Power	Total Inverter Power	DC/AC Ratio
10.5 KW	10 KW	1.05

Inverter#No.	AC power	No.String	String Size	DC Power	DC/AC Ratio
Inv1	10 KW	2 Strings	14	10.5 KW	1.05

Protection Switches

ID	Qty	No.Poles	Vn	In	Icu
MCB1	2	4	380V	20 A	10KA

Conductor and Conduit

ID	Conductor	Conductor Size	Conductor Diamter	Length
1	Solar cable	1x4 mm2	—	Lot
2	Cu/XLPE/PVC	4x6 mm2	—	Lot

LEGEND

- DC/AC INVERTER
- PV ARRAY
- GROUNDING
- AUTOMATIC C.B
- Sn String Number
- AC Panel

Sheet 1/1

Arab Organization for Industerialization
Arab Renewable Energy Company

ARECO - 10.5 KW PV Plant - On Roof

Dsg. by Eng. Hanaa Mousa

Rev. by Eng. Heba Ibrahim

Date : Jun. 2022

Title: GENERAL SINGLE LINE DIAGRAM