Design 1 Demo Project, 2141 Icon Way, Vacaville, CA 95688, USA

Shading Heatmap



Shading by Field Segment


Description	Tilt	Azimuth	Modules	Nameplate	Shaded Irradiance	AC Energy	TOF[2]	Solar Access	Min TSRF[2]	Avg TSRF[2]
Field Segment 1 (copy 1)	Module: 15°	Module: 180°	60	22.80 kWp	2,065.3 kWh/m²	39.49 MWh[1]	96.2%	99.8%	95.9%	95.9%
Field Segment 1 (copy 2)	Module: 15°	Module: 180°	60	22.80 kWp	2,065.4 kWh/m²	39.66 MWh[1]	96.2%	99.8%	95.9%	95.9%
Field Segment 1 (copy)	Module: 15°	Module: 180°	60	22.80 kWp	2,065.4 kWh/m²	39.36 MWh[1]	96.2%	99.8%	95.9%	95.9%
Totals, weighted By kWp			**180**	**68.40 kWp**	**2,065.3 kWh/m²**	**118.50 MWh**	**96.2%**	**99.8%**	**95.9%**	**95.9%**

[1]approximate, varies based on inverter performance


[2]based on location Optimal POA Irradiance of 2,152.9 kWh/m² at 34.1° tilt and 183.2° azimuth

Design 1 Demo Project, 2141 Icon Way, Vacaville, CA 95688, USA


Energy Consumption

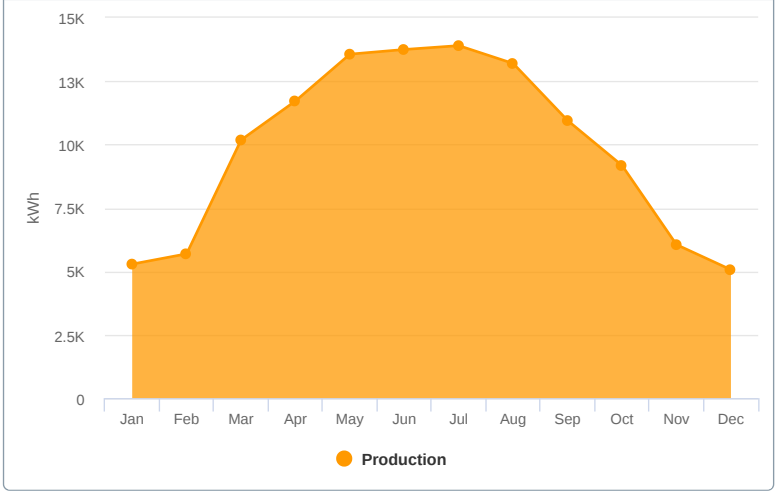


System Loss

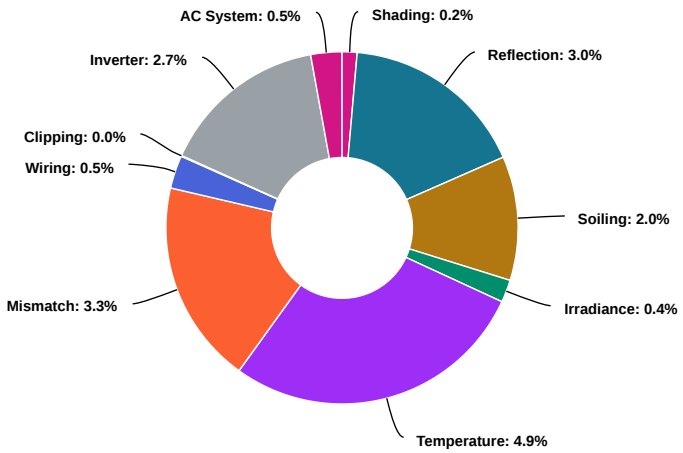

Southwestern Angle

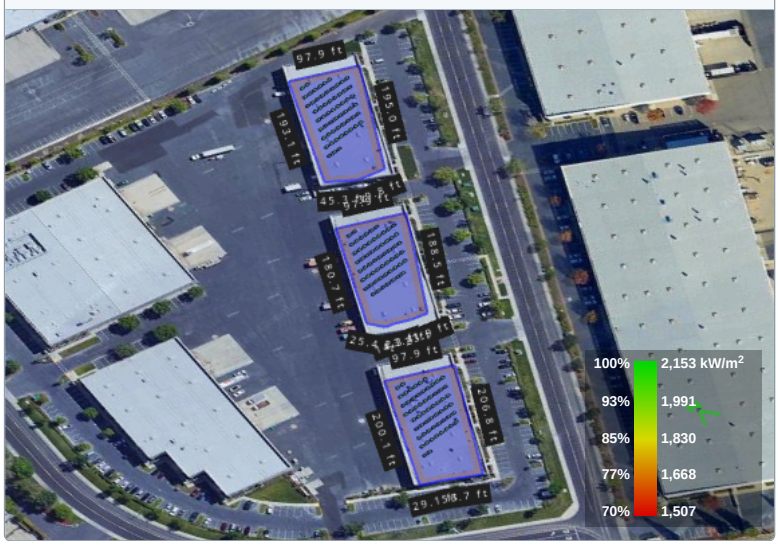

Southeastern Angle

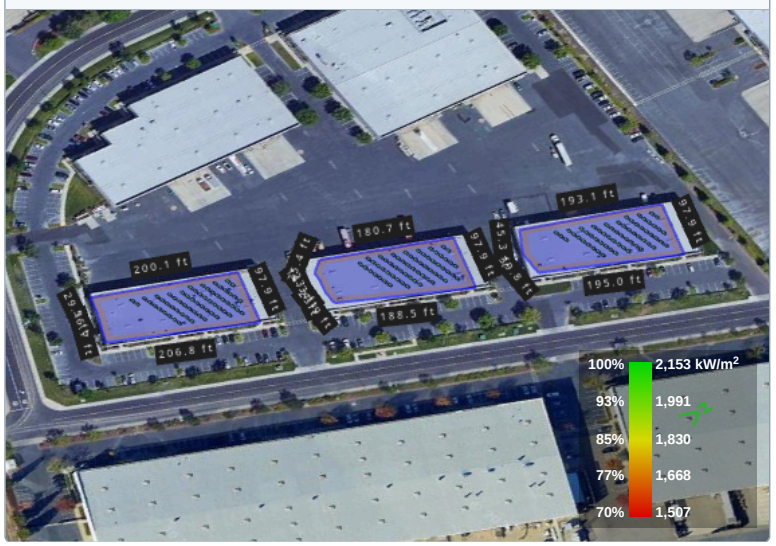

Solar Access by Month

Description	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Field Segment 1 (copy)	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Field Segment 1 (copy 1)	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Field Segment 1 (copy 2)	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Solar Access, weighted by kWp	99.8%	99.8%	99.8%	99.8%	99.7%	99.7%	99.7%	99.8%	99.8%	99.8%	99.8%	99.8%
AC Power (kWh)	5,284.1	5,688.8	10,178.5	11,717.1	13,563.2	13,747.2	13,899.8	13,195.4	10,945.3	9,172.4	6,050.4	5,061.9